

MORTAR HOSE ULTRALIGHT 42 mm

INNOXAT

Dimensionally stable textile hose made of polyester with inside rubber coating and external PVC-coating.

As the last piece for pouring liquid screed - greatly simplifies the work.

just 500 g/lfm

approx 70 % less weight*

mounted with double steel belt



pressure 40 bar

inner diameter 42 mm

nozzle flow passage 40,5 mm



For the watering hose with 1 meter protective spiral, fixed with a heat shrink tube.

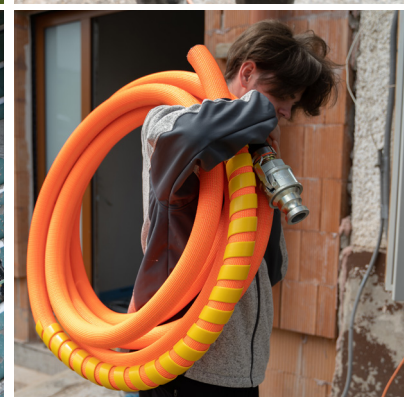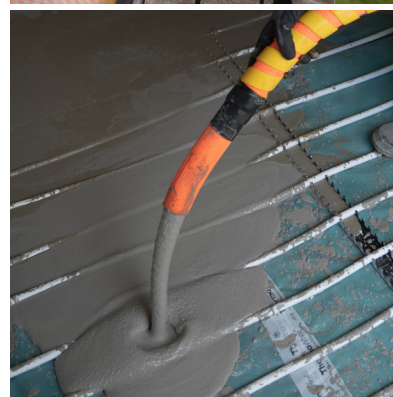


*compared to conventional rubber hose

as purring hose one side with coupling

Completely mounted with protective spiral fixed with a heat shrink tube.


with nozzle 2" AG one side

Item	weight	bundle
3223-410	5,5 kg	10 m
3223-420	10,5 kg	20 m

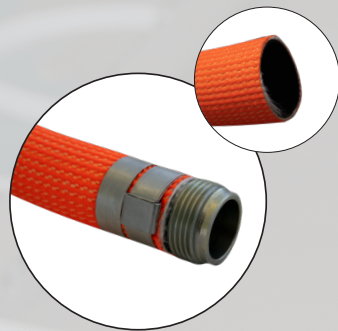

with MK50 MT coupling
one side
System 22

Item	weight	bundle
3223-411	6,5 kg	10 m
3223-421	11,5 kg	20 m

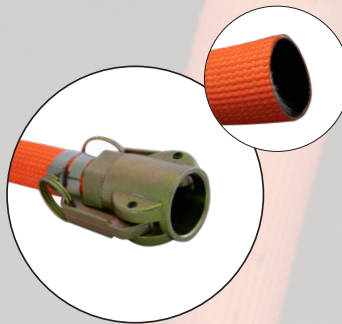

mit MK50 VT coupling
one side
System 22

Item	weight	bundle
3223-412	6,3 kg	10 m
3223-422	11,3 kg	20 m




als mortar hose - both sides

Completely mounted with a heat shrink tube on both sides.

with nozzle 2" AG both sides

Item	weight	bundle
3224-410	6,0 kg	10 m
3224-420	11,0 kg	20 m

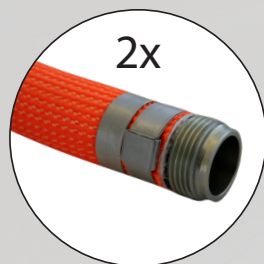

with MK50 VT/MT coupling
both sides
System 22

Item	weight	bundle
3224-411	7,8 kg	10 m
3224-421	12,8 kg	20 m

